

VINYL . T



Water-resistant
72 hours

- No swelling
- No delamination
- No mold



Advantages

- Highly resistant: suitable for any commercial, industrial and private use.
- Water-resistant, extremely stable, quiet, warm and durable.
- Very good noise reduction.
- High wear resistance, hygienic, maintenance-friendly.
- Fire-retardant, natural design.
- No underfloor needed.
- Easy to install: 5G click system, floated installation.

To be placed in the same way as a laminate floor, take into account the expansion joints!



CLICK



CONTROLLED



EU-CONFORM



LOWEST
EMISSION



FIRE
RESISTANT




ECO
FRIENDLY

Technical specifications


Surface	LVT decor
Wear class	Class 42
Middle layer type	Mineral core
Bevel	Micro bevel
Gloss	5 +- 3%
Locking system	5G-click
Type of installation	Floating

STRUCTURE

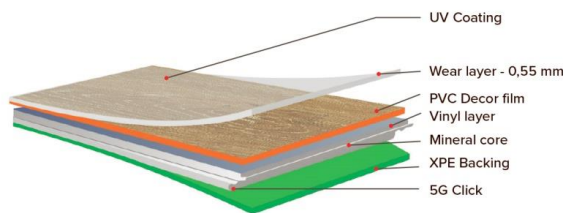

CHARACTERISTICS

Light stability	ISO 105-BO2: 6 or above
Dimensional stability	ISO 23999: Pass
Curling after exposure to heat	ISO 23999: Pass
Dimension	ISO 24340: Pass
Overall thickness	ISO 24346: Pass
Wear resistance	EN 660-2: Pass
Residual Indentation	ISO 24343-1: Pass
Effect of Castor chair	ISO 4918: Pass
Resistance to staining	ISO 26987: Pass
Reaction to fire	EN 13501-1: Bfl-S1
Formaldehyde emission	EN 717-1: E1
Slip resistance	EN 13893: Class DS
Impact noise reduction	ASTM E492-09(2016) ^{e1} : 10 ΔLin
Walking noise reduction	ASTM E492-09(2016) ^{e1} : IIC = 73 / dB 21

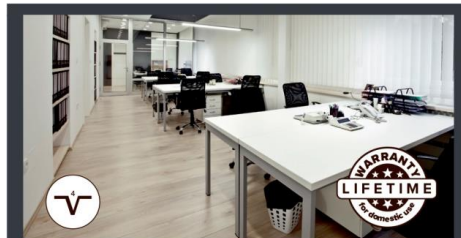

VINYL .T


ENGINEERED LUXURY
VINYL FLOORING

EXTREMELY STABLE
 EASY TO INSTALL
 EASY TO CLEAN
 NO UNDER FLOOR NEEDED
 WATERPROOF
 HIGHLY RESISTANT
 NOISE REDUCTION

5G-CLICK INSTALLATION



**WATER
RESISTANT**



**UV
RESISTANT**



**FLOOR
HEATING**



ANTI-SLIP



REAL FEELING



CLASS 42